


Para-Lite 2™ (Styles 2 & 3)

Plastic Parabolic Louver

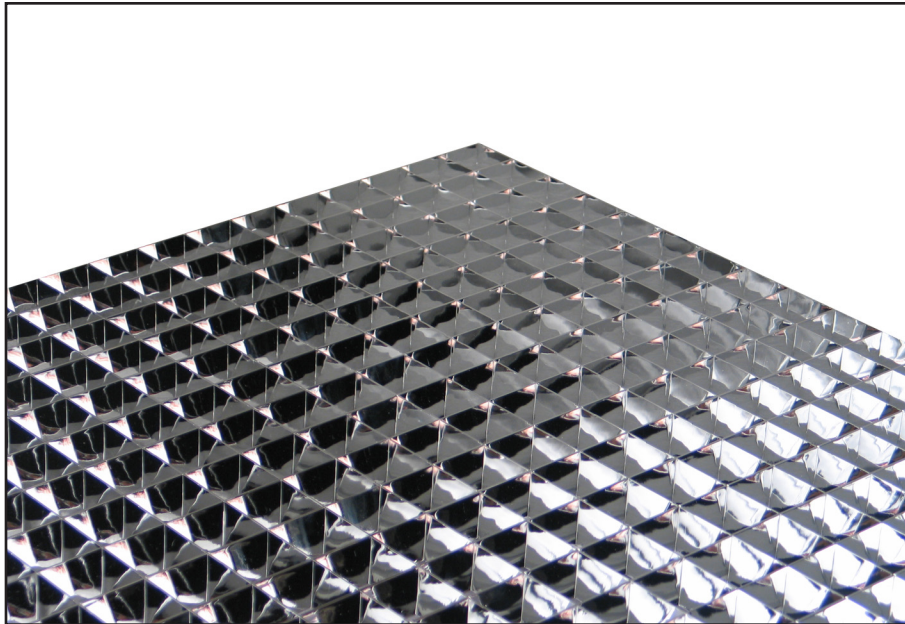

Para-Lite 2 Style 2

Description

The Para-Lite 2™ is an extremely efficient louver that maintains excellent low brightness. The 1-1/2" x 1-1/2" x 1" parabolic cell provides a bolder appearance in fixtures or luminous ceiling applications, with numerous perimeter variations and color options available.

Application

Medical facilities, department stores, conference rooms, entries and corridors, perimeter lighting, computer rooms and elevators.

Ordering Information

Please call 877-257-5841 for price and delivery.

Notice

A.L.P. Lighting Components, Inc. assumes no responsibility for suitability of luminaires and applications.


Para-Lite 2 Plastic Parabolic Louver

1-1/2" x 1-1/2" x 1" parabolic louver provides maximum illumination efficiency and excellent low brightness qualities for Office, Retail and Medical environments

Materials: Polystyrene

Style 3

Total Luminaire Efficiency	51.9%	
VCP	.99	
Plane	0°	90°
Spacing Criteria	1.2	1.6
Shielding Angle	31	31




Louver	Style	Size	Material / Finish	Fabrication Options
Para-Lite 2 1- 1/2" x 1- 1/2" x 1"	2 - Ceiling Style 1 x 4 - O.D. 11-3/4" x 47-3/4" 2 x 2 - O.D. 23-3/4" x 23-3/4" 2 x 4 - O.D. 23-3/4" x 47-3/4"	14 - Style 2 Only 22 - All Styles 24 - All Styles	SPS - Specular Silver, Polystyrene SPG - Specular Gold, Polystyrene	CUT - Cut to Size AN - Avoida-Notch Framing Note: Cut to size - on Cut to Size orders O.D. must be provided. Cut to Size louvers must be able to fit directly into the doorframe. Note: Avoida-Notch - O.D. must be provided. Avoida-Notch to be used when louver cannot fit into the doorframe (for Style 2 only).
enter PL2	3 - Fixture Style (narrow body) 2 x 2 - O.D. 22-1/2" x 22-1/2" I.D. 20" x 19-9/16" 2 x 4 - O.D. 22-1/2" x 46-1/2" I.D. 20" x 44-11/16"	enter size	enter finish	enter options
	enter style			

To Order: Select description from each column and include "options" if applicable.

Note: All Para-Lite 2 louvers are destaticized before and after fabrication to ensure a high quality product.



Para-Lite 2 (Styles 2 & 3)

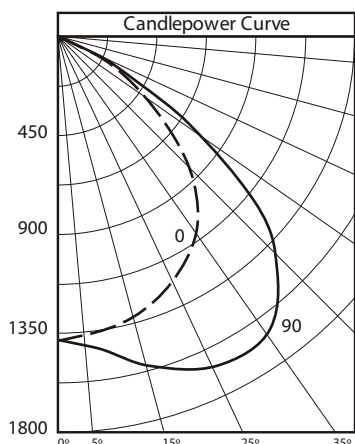

TS: TECHNICAL SUPPORT
 Lighting Research Laboratories, Inc.
 Test Report No. LRL 397-3E
 Date 03/05/97
Description: Commercially available 2' x 4' Troffer
 2/32W T8 Lamps, 1" deep
 Parabolic Specular Silver louver
 Luminaire Watts = 60.2
 Efficiency = 51.9%
 Catalog Number: Louver PL2 SPS 3
 Lamp Type: F32T8/TL80
 Lumens: 3050
 Number of Lamps: 2

Specifications

Style 2 - Ceiling Style

Style 2 is designed to fit any standard 1' x 4', 2' x 2' and 2' x 4' grid systems.

Style 3 - Fixture Style

Parabolic Louvers shall be Para-Lite 2 (Style 3) for lighting fixture application, as manufactured by A.L.P. Lighting Components, Inc. These louvers shall be one piece injection molded of polystyrene or acrylic base material with all parabolic surfaces prepared with a primary undercoat and a highly specular vacuum metalized finish. Louver panels shall have an integrally molded flange on all sides to fit 2' x 2' or 2' x 4' fluorescent fixtures. Cell size: 1-1/2" x 1-1/2" x 1" square cell, providing 31° shielding from all angles. This louver shall have an efficiency of not less than 51.9% and a VCP index rating of .93 (specular silver finish). Sizes are nominal. Please check customer service for exact sizes of each style.



Parabolic Data

General

A.L.P. parabolic louvers are the most sophisticated and optically precise lighting control panels available in the industry. The proper installation, care and handling of these louvers will ensure excellent light control and product serviceability for many years.

Care & Handling

Great care should be exercised when handling parabolic louvers, avoiding contact with oily and/or foreign substances. Always handle louver panels with clean white gloves - never use bare hands. Always install these louvers after the space has been completed and is ready for occupancy - never during construction.



This drawing is for reference only. Actual part dimensions will vary. Customer is urged to review actual samples to confirm fit and function. All specifications and dimensions are subject to change without notice.