

LED-8085M 60W LED for HID Retrofit for Post Top / Wall Pack



Models


LED-8085MXX, 120-277VAC, cULus, 3000K, 4200K or 5700K CCT, E39

Features

- > 60W LED Replaces 250W MH or HPS HID Lamps
- > Meanwell PWM & 0-10V Dimmable driver
- > Driver can be mounted up to 20 meters from lamps with negligible reduction in light output.
- > UL approved for wet environments
- > 50,000 hour rated LED life (supported by LM80 and ISTMT reports (see website))
- > 5 Year Limited Warranty - see website for details
- > UL1598C retains fixture UL Listing
- > Rated for enclosed fixture

HID-X


- EXTERNAL DRIVER LED
- IP65 RATING
- 0-10V / PWM DIMMING

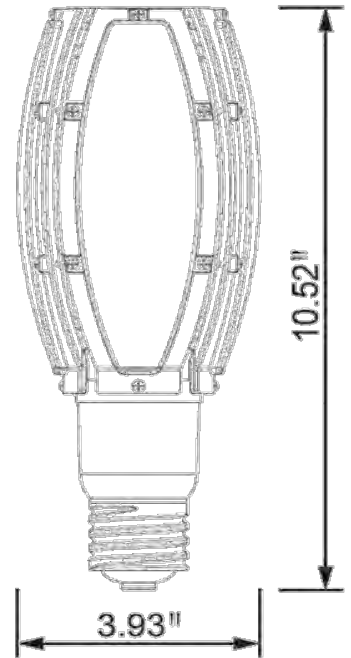

Technical Specifications

Models US/CAN	LED-8085M30	LED-8085M42	LED-8085M57
CCT	3000K	4200K	5700K
Power Consumption	60 watts		
Replaces	175w - 250w MH/HPS		
Mounting	E39		
Voltage	120-277VAC (USA)		
LED Type	180 Samsung #5630 SMD		
Beam Angle	360°		
Dimmable	Yes		
Operating Temp	-40°F - +122°F		
Rated R70 Life	Up to 50,000 Hrs.		
Warranty	5 Year Limited*		

Polar Curves

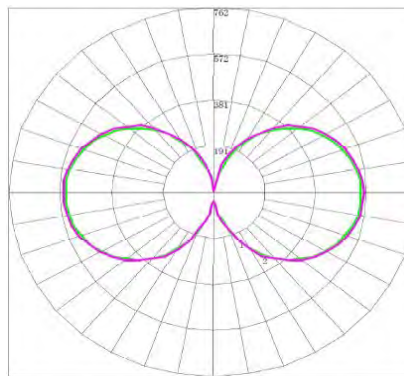

DLC	MODEL	DLC CODE
DLC 0-10V E39	LED-8085M57	PP8J9AQ
	LED-8085M42	P5BSN779

Approved Categories:
Replacement Lamps for Outdoor Pole/Arm-mounted
Decorative Luminaires (Type C)

Installation Notes:

- Ballast must be bypassed
- Installing surge/lightning protectors is highly recommended

LED Power Consumption (Watts)	HID Power Consumption (Watts)	HID Ballast Power Consumption (Watts)	Total Savings (Watts)	Annual Energy Savings (14 hrs/day)	Lifetime Energy Savings (over 50,000 hrs)
60	250	50	240	\$135	\$1,320.00

LM79 Specifications	Yes	Yes	Yes
Power (W)	56.6	57.2	57.1
CCT	3139	4102	5841
Light Output	5326	5807	6130
Efficacy	94.1	101.5	107.4
THD @ 277V	15.13%	15.24%	15.09%
PF @ 277V	0.911	0.911	0.911
CRI:	84	96.2	84.7
R9	18	29	14
Duv	0.0011	-0.001	0.0019

Packaging	4 / Master Carton
Unit	7.5" x 5.44" x 12" 3.99 lbs.
Master	15.8" x 11.6" x 12.6" 25.5 lbs.

Mounting Orientation			Minimum Fixture Size Requirements (inches)	
Base Up	Base Down	Horiz	Length	Width
			12.52	5.93
Approved	Approved	Approved	Height	5.93
			Cu. Inches	440.3



188 S. Northwest Highway • Cary, IL 60013
(847) 380-3540 • FAX: (847) 380-3542
www.led-llc.com

