

LED-9300 300W High Bay HID Luminaire



Models

LED-9300-50K, 120-277 VAC, cULus, 5000K

Features


- 300 Watts Replaces 1000W HID Luminaire equivalent
- 120° Beam Angle
- 120-277V UL 1993
- UL classified for damp environments (USA & Can)
- >50,000 rated LED life
- 5 year limited warranty (see website for details)
- 5000K CCT
- Includes 3' three-wire corded whip



Technical Specifications

Models US/CAN	LED-9300-50K
CCT	5000K
Power Consumption	300 Watts
Replaces	1000 MH/HPS
Mounting	n/a
Voltage	120-277VAC
LED Type	2835
Beam Angle	120°
Dimmable	No
Operating Temp	-40°F - +122°F
Rated R70 Life	Up to 50,000 Hrs.
Warranty	5 Year Limited*
LM79 Specifications	
LM79 Specifications	Yes
Power (W)	306.5
CCT	3474
Light Output	38303
Efficacy	125
THD @ 277V	14.85
PF @ 277V	0.98
CRI:	83.9
R9	11
Duv	-0.0007
Packaging	
Packaging	Master/ 1
Unit	TBD
Master	47.64" x 25.79" x 5.51"

Lux Distance Curve

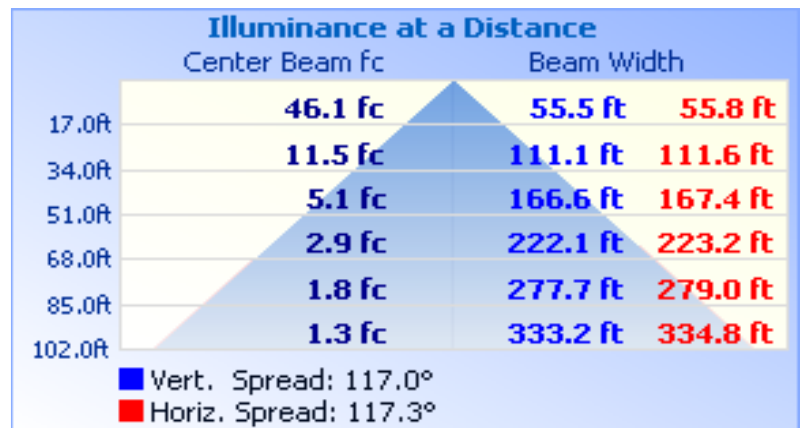

LED-9300-50K

LED Power Consumption (Watts)	HID Power Consumption (Watts)	HID Ballast Power Consumption (Watts)	Total Savings (Watts)	Annual Energy Savings (14 hrs/day)	Lifetime Energy Savings (over 50,000 hrs)
300	1000	150	850	\$478	\$4,675.00

DLC	MODEL	DLC CODE
	LED-9300-50K	P6YVSF7J
Approved Categories: High-Bay Luminaires for Commercial and Industrial Buildings		



188 S. Northwest Highway • Cary, IL 60013
(847) 380-3540 • FAX: (847) 380-3542
www.led-llc.com

