


PRISMATIC POST TOP

The Lindy® Model 425



Model 425 Type V



Model 425

14.33" high
15.5" diameter

NOSTALGIC POST TOP FOR
STREET AND AREA LIGHTING

TYPE III AND TYPE V
DISTRIBUTIONS

Model 425 Type III
Medium non-cutoff
83.17% Efficiency
16.51% Uplight with LiteLid®
66.5% Downlight

Materials: Acrylic,
Acrylic Moon Glow™
and Polycarbonate

Description

LexaLite's The Lindy® Model 425 refractor is designed to mate with your own top and can be used in parks, along walkways, roadways or areas where a distinctive nostalgic theme is prevalent. It features a traditional turn-of-the-century shape, and provides state-of-the-art performance. This refractor bottom is 15.5" in diameter, 14.33" high and is designed to be used with poles 10'–20' in height. This refractor is available in polycarbonate, for use in areas where breakage is a concern and HID acrylic and acrylic Moon Glow™ (diffuse acrylic), for high efficiency in general lighting applications. This component can also be produced in high heat acrylic and impact acrylics.

Application

LexaLite's The Lindy Model 425 refractor is for use in parks, along walkways, roadways or areas where a distinctive nostalgic theme is prevalent.

Lamp Data

The Model 425 is capable of being used with 150W diffuse HPS or 175W coated MH vertical base down lamps. The Model 425 can be used with up to 250W lamps. Luminaire design, reflector configuration, lamp position and ambient temperature will affect the inside

surface temperature. Thermal tests should be conducted on each luminaire design to confirm appropriate lamp size for the application.

Ordering Information

Please call 877-257-5841 for price and delivery. Typical lead time is four to six weeks.

Service Life

The service life of acrylic refractors is virtually unlimited when used within the recommended temperature limit. Acrylic versions are covered by our 10 year limited warranty. Polycarbonate refractors are subject to yellowing especially when used with high ultraviolet output light sources; this effect is enhanced at high temperatures.

Notice


A.L.P. Lighting Components, Inc. assumes no responsibility for suitability of luminaires and applications. The use of our molded products at excessive temperatures with high UV output light sources will cause degradation of the material. Information regarding the use of lenses and refractors with Metal Halide lamps can be found in the Products/Technical Resources section of our web site at www.alplighting.com. *See second page for important UL information.




A.L.P.
LIGHTING COMPONENTS, INC.
WEB SITE: WWW.ALPLIGHTING.COM

LEXALITE

Model 425

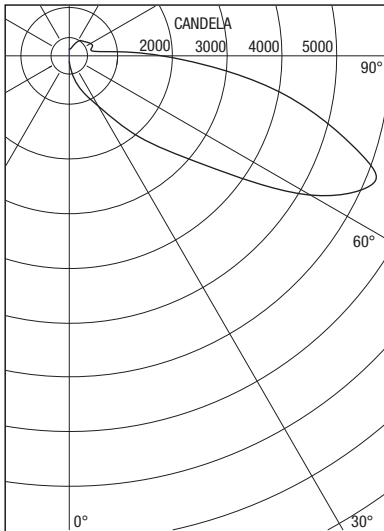

Report Number: ITL48839
 Total Luminaire Efficiency = 83.01%
 IES Classification: Type III, Medium, Non-Cutoff

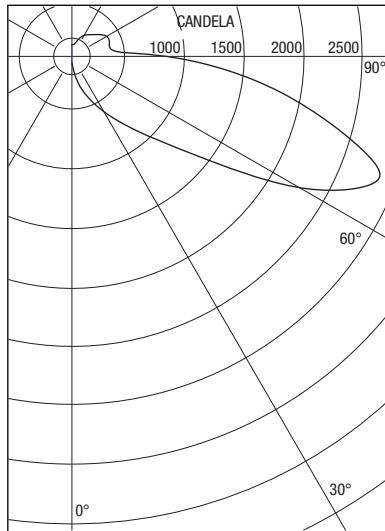

Report Number: ITL48840
 Total Luminaire Efficiency = 83.17%
 IES Classification: Type V, Non-Cutoff

Photometrics

The Model 425 is available in IES Type III and Type V distributions, and will classify as medium, non-cutoff, depending upon lamp type and lamp center location. The Model 425 Type III, coupled with the perforated LiteLid, acorn top and a 175W phosphor-coated MH lamp, produces 6169 candela at 67.5° vertical and 72.7° lateral (ITL48839). The Model 425 Type V, coupled with the perforated LiteLid, acorn top and a 175W phosphor-coated MH lamp, produces 2835 candela at 67.5° vertical (ITL48840). Both the Type III and V distributions are optimized with diffuse HPS and coated MH lamps. Use of clear lamps may result in reduced uniformity. Individual luminaire performance depends on the lamp center position and the reflector design chosen. Each luminaire design should be individually tested for proper classification. Please call for additional photometric data. Design light center is located 3.0" down from upper rim.

Accessories

LiteLid® LiteLids should be utilized in light pollution-sensitive areas to redirect potentially wasted uplight into increased downward efficiencies. The LiteLid allows just enough uplight for a pleasing glow. LiteLids are patented, aluminum reflectors which fit between the top and bottom components.

4245P Perforated LiteLid

4245N Non-perforated LiteLid


Stainless Steel Clamp Band For attachment of top.

Neck Ring Protects fitter from metal screws.

Materials

See the LexaLite® brand price list for current part numbers and material offerings. Up-to-date and detailed material specifications can be found in the Products/Technical Resources section of our web site at www.alplighting.com.

When using an acrylic Model 425, the surface temperature of the refractor should not exceed 80°C. When using a polycarbonate Model 425, the surface temperature of the refractor should not exceed 90°C.

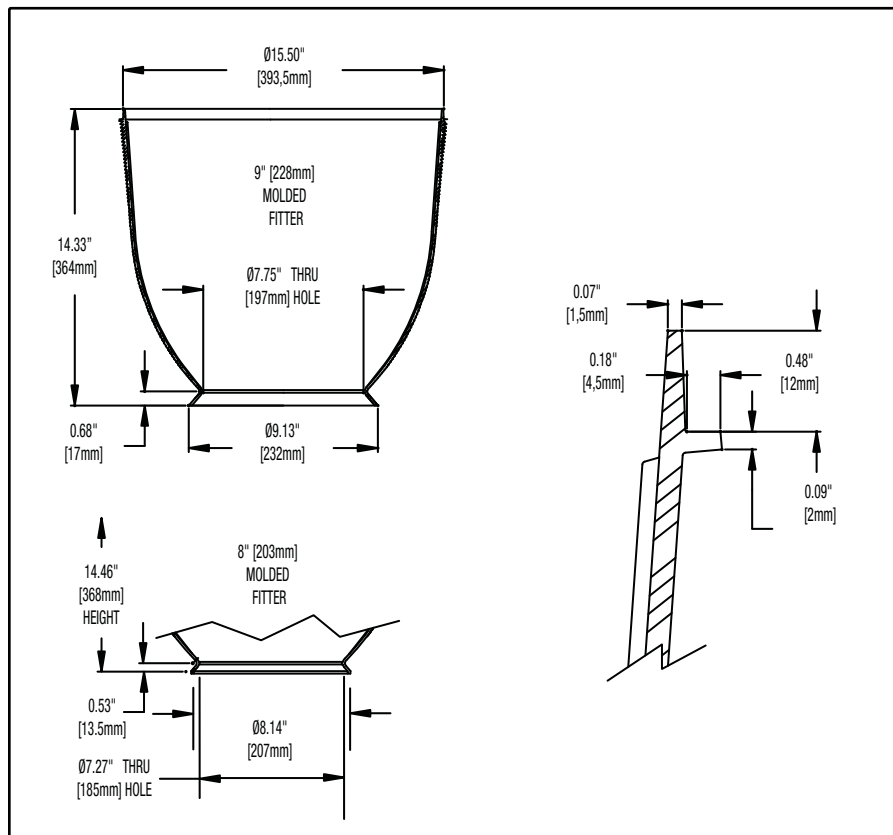

This drawing is for reference only. Actual part dimensions will vary. Customer is urged to review actual samples to confirm fit and function. All specifications and dimensions are subject to change without notice.

***Effective June 30, 2010, lenses associated with this product will no longer be UL recognized components. A.L.P. LexaLite recommends the use of open rated lamps with any polymeric lens. These lenses should not be used as arc retention devices.**

