

# CCP Series

# Cambridge Series Commercial Post Top



CCP Series

### SPECIFICATIONS

- Cast Aluminum Alloy Housing
- Polyester Powder Coat Finish
- Brass and Stainless Steel Hardware
- Choice of Lensing Options
- Multiple Light Source Options and Wattages
- Choice of Colors or Custom Colors
- Optional Surge Protection

### APPLICATIONS

- General Area and Street Lighting
- Towns, Neighborhoods and Office Parks
- Campuses, Walkways, Street
- 8-14 Foot Mounting

### ELECTRICAL

- 120V: HPS 35-150W, 15W LED
- Quad Volt: 50-250W MH, HPS 50-250
- 120-277V: 20-36 LED and CF

### INSTALLATION

- Mounts to 3" Pole or Tenon

### CERTIFICATIONS/LISTINGS

- UL Listed
- Listed for Wet Locations



PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

### ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CCP M 150 Q WH BK

CCP					
Series	Light Source M Metal Halide* *P Use P Pulse Start - 250W H High Pressure Sodium F Compact Fluorescent L Light Emitting Diodes	Watts MH HPS CF LED 50 35 13 15 70 50 26 20 100 70 36 150 100 250 150 250	Volts 120 120V Q 120/208/240/277V UNV 120-277V	Lens WH White PC Prismatic Clear TC Textured Clear HS House Side Shield* * Partial Black Out Panels	Color/Options BK Black WH White BZ Bronze GN Green CC Custom Color Options L Lamp SP Surge Protection

### SPECIFICATIONS



**Lighting**  
Plastics  
**Solutions**  
RETROFIT SPECIALISTS

Specifications Subject to Change

# LCP Series

# London Series Commercial Post Top



LCP Series

### SPECIFICATIONS

- Cast Aluminum Alloy Housing
- Choice of Lensing Options
- Black, White & Bronze Polyester Powder Coat Finish, Optional Custom Color
- Medium 4KV or Mogul 5KV Base Socket
- Stainless Steel Hardware
- Multiple Light Source Options and Wattages
- Optional Lamped

### APPLICATIONS

- General Area and Street Lighting
- Towns, Neighborhoods, and Office Parks
- Campuses, Walkways, Street

### ELECTRICAL

- 120V: MH & HPS 35W, 50W, 100W & 150W  
LED 15W, 20W & 36W
- Quad Volt: MH & HPS 50W, 70W, 100W & 150W  
HPS 250W
- 120-277V: CF 13W & 26W LED 15W, 20W, 36W,  
40W & 60W (Integrated LED 40W & 60W)

### INSTALLATION

- Mounts to 3" Pole or Tenon
- 8 to 14 Foot Mounting Height

### CERTIFICATIONS/LISTINGS

- UL Listed
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

### ORDERING/SPECIFYING INFORMATION:

EXAMPLE: LCP M 150 TC Q.BK

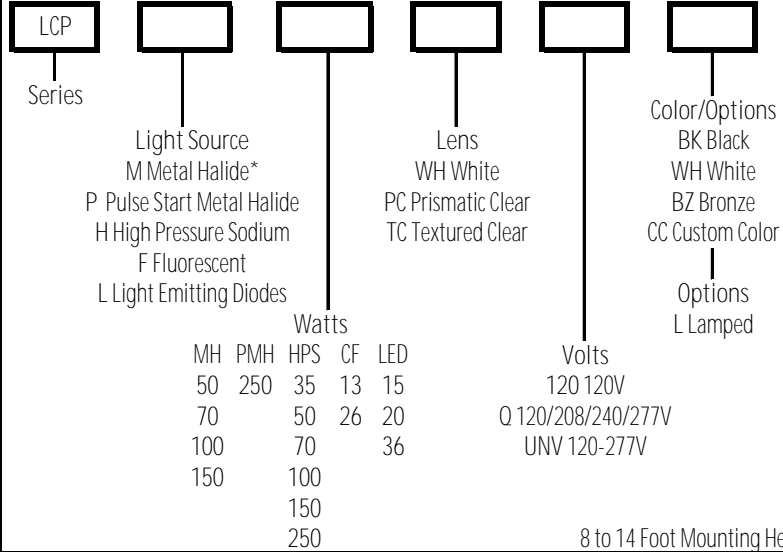

### SPECIFICATIONS



### OPTIONS/ACCESSORIES

**Lighting**  
Plastics  
**Solutions**  
RETROFIT SPECIALISTS

Specifications Subject to Change