

Product Description:


General illumination typically used to replace 2x2 and 2x4 fluorescent troffers. The Magic Panel is designed to lay in drop ceilings in offices, schools, showrooms, airports, retail locations, and healthcare facilities. Ultra modern design with an industry leading 110 lumens per watt, the Magic Panel is the ideal fluorescent lay-in replacement.

Features:

- Edge-lit LED array with translucent diffuser provides uniform illumination
- Ultra-slim Aluminum Frame - <0.5inch
- Custom color temps available
- UL listed
- LM-79, and IES available upon request
- 50,000 hour L70 lifespan
- Lumen efficacy is greater than 110 lumen/watt
- External UL Listed Class-2 Constant Current Driver
- Universal Voltage: 100-277V. *100-382V available
- Multiple mounting options
- Suitable for damp locations
- High Power factor -.99
- Ease of installation and maintenance
- 0-10V dimming
- SMD 2835 LED chips
- Premium Mean Well Driver available upon request

Applications:

- Office
- Healthcare
- Commercial
- Industrial
- Airport
- Conference Room
- Education
- Government
- Showroom
- Hotel

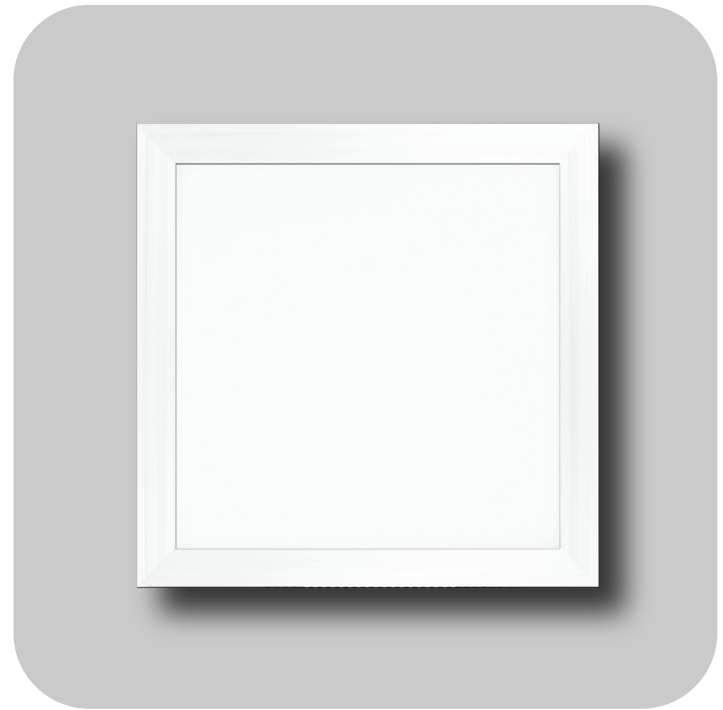

Common Technical Data:

Color Temperature	2700K to 5000K
Beam Angle	120 Degrees
CRI	> 80
Operation Temperature	-20°C to 50°C
Efficiency	More than 110 LPW
Input Voltage	100-277VAC, *347 Available
Power Factor	More than 0.99
Rated Life	50,000 hours
Input Frequency	50/60Hz

www.mygpsolutions.com

TAMPA BAY - CORPORATE OFFICE

2140 Range Road, Suite A | Clearwater, FL 33765 | 800-547-3310 | 727-411-9581 | 727-466-2451 fax

CENTRAL FLORIDA

2119 Directors Row, Suite 5 | Orlando, FL 32809 | 800-682-4197 | 407-398-1001 | 407-398-1003 fax


SOUTHEAST US

3367 W Hospital Avenue, Suite B | Chamblee, GA 30341 | 800-548-9101 | 770-817-7020 | 770-817-7021 fax

NORTHEAST US

6965 Airport Highway Lane | Pennsauken, NJ 08109 | 877-619-9596 | 856-661-2442 | 856-661-2447 fax

info@mygpsolutions.com

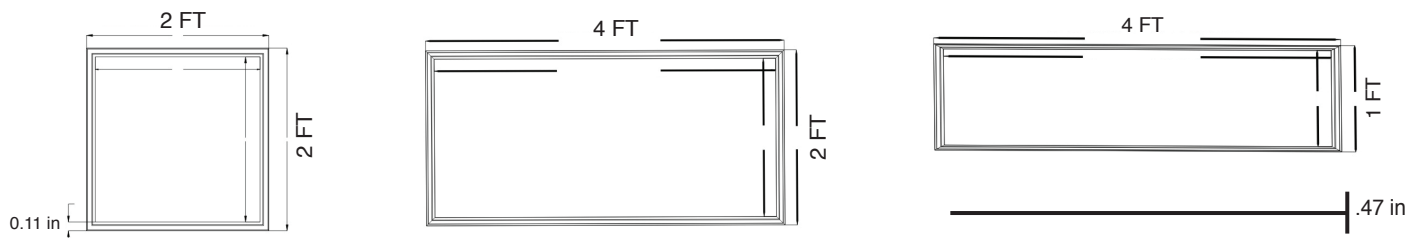

Product Specification:

Product Code	Length (FT)	Color Temperature	Description			Input Voltage	Lumens	Packing/ Carton	Weight/ Carton (kg)
			CRI	Wattage	Dimmable				
ZY-P1-40W CDS PREMIUM JAMES DRIVER	1X4	4000K/5000K	>80	40W	0-10V Dimming	AC100-277V	4400 lm	126x37x11cm 2 pieces	9.8kg
ZY-P4-30W CDS PREMIUM JAMES DRIVER	2X2	4000K/5000K	>80	30W	0-10V Dimming	AC100-277V	3300 lm	73x73x17cm 2 pieces	10.2kg
ZY-P4-40W CDS PREMIUM JAMES DRIVER	2X2	4000K/5000K	>80	40W	0-10V Dimming	AC100-277V	4400 lm	73x73x17cm 2 pieces	10.2kg
ZY-P7-50W CDS PREMIUM JAMES DRIVER	2X4	4000K/5000K	>80	50W	0-10V Dimming	AC100-277V	5500 lm	73x133x17cm 2 pieces	17.2kg
ZY-P7-75W CDS PREMIUM JAMES DRIVER	2X4	4000K/5000K	>80	75W	0-10V Dimming	AC100-277V	8250 lm	73x133x17cm 2 pieces	17.2kg

* Premium Mean Well Driver available upon request

* Non-Dimmable driver available upon request

* Custom color temperature available upon request

Ordering Guide:

ZY	P1/P4/P7	30W/40W/50W/75W	CDS/CNS	3000K-5000K
Company Code	Panel Size	Wattage	Dimming/Non-Dimming	CCT

Warranty:

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. Lighting Plastic Solutions does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is an addition to the statutory rights in the country of purchase. Lighting Plastic Solutions reserves the right to alter specifications without prior notice.

www.mylpsolutions.com

TAMPA BAY - CORPORATE OFFICE

2140 Range Road, Suite A | Clearwater, FL 33765 | 800-547-3310 | 727-411-9581 | 727-466-2451 fax

CENTRAL FLORIDA

2119 Directors Row, Suite 5 | Orlando, FL 32809 | 800-682-4197 | 407-398-1001 | 407-398-1003 fax

SOUTHEAST US

3367 W Hospital Avenue, Suite B | Chamblee, GA 30341 | 800-548-9101 | 770-817-7020 | 770-817-7021 fax

NORTHEAST US

6965 Airport Highway Lane | Pennsauken, NJ 08109 | 877-619-9596 | 856-661-2442 | 856-661-2447 fax

info@mylpsolutions.com