


Plastic Louvers

1/2" x 1/2" x 1/2"

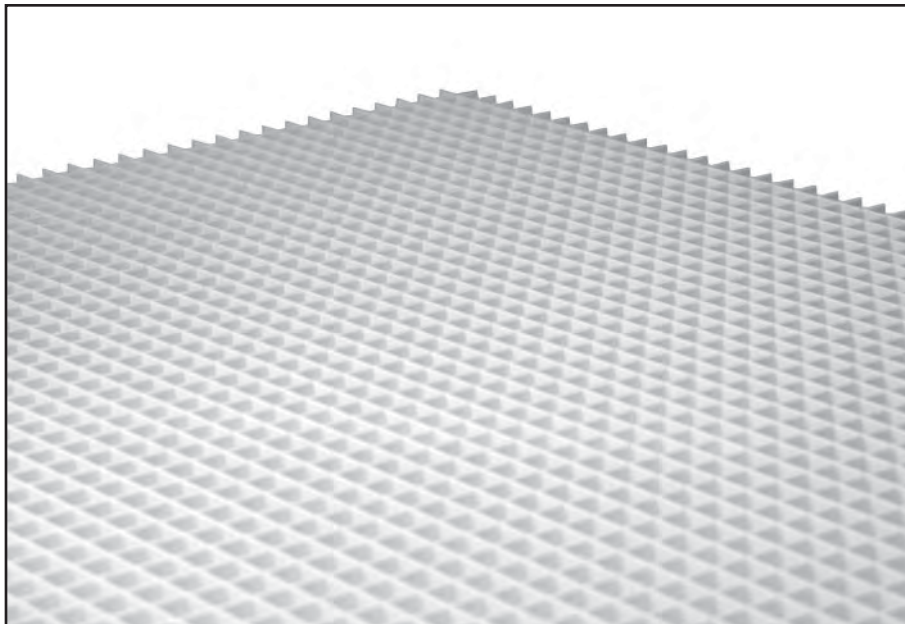

Plastic Louver

Description

Straight-blade, or non-parabolic plastic lighting louvers are an efficient, economical solution for a variety of lighting and luminous ceiling applications. A longtime industry standard, the open cell design provides a well ordered, architectural appearance, while at the same time permitting free circulation of air for lower operating temperatures, longer ballast life, and improved lamp performance.

Application

Conference rooms, commercial and municipal buildings, entries and corridors, perimeter areas and computer rooms.

Ordering Information

Please call 877-257-5841 for price and delivery.

Notice

A.L.P. Lighting Components, Inc. assumes no responsibility for suitability of luminaires and applications.


Catalog Number	Color	Dimensions
Polystyrene 1/2" x 1/2" x 1/2"		
ALP45 14	White	11-3/4" x 47-3/4"
ALP45 22	White	23-3/4" x 23-3/4"
ALP45 24	White	23-3/4" x 47-3/4"
Acrylic 1/2" x 1/2" x 1/2"		
ALP45A 14	White	11-3/4" x 47-3/4"
ALP45A 22	White	23-3/4" x 23-3/4"
ALP45A 24	White	23-3/4" x 47-3/4"
TCLC	Plastic Louver Clip for 1/2" deep louvers	

All Plastic Louvers are destaticized before and after fabrication to ensure a high quality product. Special sizes and shapes are available, contact A.L.P. To specify Avoida-Notch™, add appropriate suffix to Catalog number AN50-W (white). All 1' x 4' and 2' x 2' louvers MUST be purchased in even multiples. Shipments of oversize louvers are subject to a special packaging charge.

Plastic Louvers

Straight-blade 1/2" x 1/2" x 1/2" louvers for use in Office, Retail, Commercial and Medical environments.

Material: Polystyrene and Acrylic



Plastic Louvers

Specifications

Acrylic and polystyrene louvers shall be injection molded in one-piece 100% white translucent plastic as manufactured by A.L.P. Lighting Components, Inc. Inside dimensions of the cells shall be 1/2" x 1/2" x 1/2" with a uniform wall thickness. Longitudinal and lateral cell walls are in the same plane and are to form continuous straight-line shielding surfaces in each direction. Plastic louvers incorporate a unique edge interlock trim to facilitate the continuous butting of panels without reversing each louver panel.

Acrylic louvers are molded in a light-stable material and are unaffected by ultraviolet exposure and will not yellow or discolor for up to 20 years.


Styrene louvers are molded in an ultraviolet stabilized material to resist ultraviolet exposure. These styrene louvers meet all industry standards.

Features

- Economical
- Reduces Glare
- Increases Ballast Life
- Improves Lamp Performance

Plastic aligner clips for joining two 1/2" inch deep louvers having offset edges. Holds the two panels securely so that shiplap fit does not separate.

Catalog Number TCLC

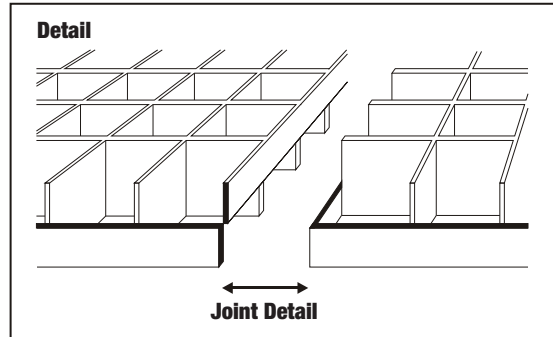

Interlocking step trim design permits panels to be butted together without a noticeable joint - providing an uninterrupted louver pattern. This jointing method is accomplished without having to reverse louver panels.

This drawing is for reference only. Actual part dimensions will vary. Customer is urged to review actual samples to confirm fit and function. All specifications and dimensions are subject to change without notice.